

**CHASE
Associates**

Quick-Opening Out-Swing Manway

for Vertical or Horizontal Installation



Standard Hinge



Locking Hinge

Product No. CM-12

Description

Chase Associates Quick-Opening Out-Swing Manways secure a hinged ASME flanged and dished head against a liquid-tight replaceable gasket with a series of quick release toggles. Provides access in seconds and conforms with OSHA Permit Required Confined Space Rules.



Typical Applications

Install in vertical or horizontal position in steel tanks or concrete walls. **For Pulp and Papermaking, Wastewater Treatment Plants, and Processing Tanks.** Available in sanitary designs.



PO Box 75 • Edgecomb, Maine 04556 • Telephone 207-882-7526 • Fax 207-882-6392

Product No. CM-12

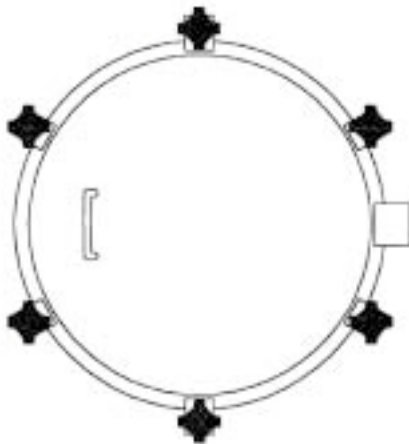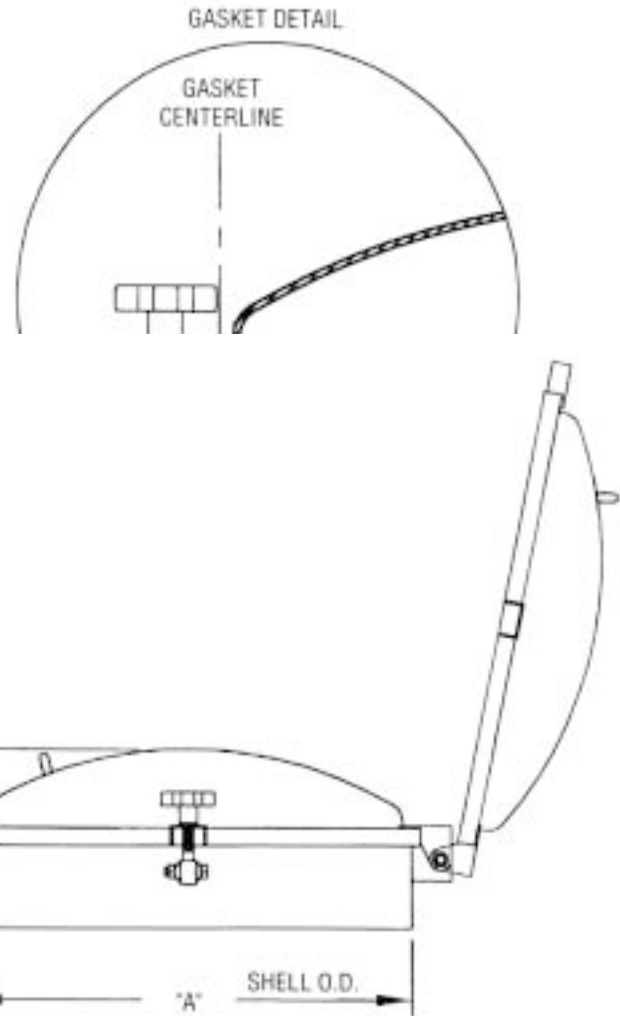

Sizes & Pressure Ratings				Construction Materials		Gasket Materials	
Size	Shell OD (A)	Height (B)	Max PSI	Stainless Steel <ul style="list-style-type: none"> • 304L • 316L • 317L 6% Moly Alloys <ul style="list-style-type: none"> • 25-6MO • AL-6XN • 254SMO Carbon Steel <ul style="list-style-type: none"> • A36 • A516 Gr. 70 Ask about other materials	<ul style="list-style-type: none"> • EPDM • BUNA-N • Neoprene • Hypalon 	<ul style="list-style-type: none"> • Viton • Chemigum • FDA approved materials Other materials available	Optional Equipment <ul style="list-style-type: none"> • Sightglasses & Lights • Drilled Mounting Flanges for bolt-up to existing flanged inserts. • Grout Rings for Concrete walls • Custom Fittings for special applications
12"	13"	8"	101				
14"	15"	9"	74				
16"	17"	9"	85				
18"	19"	9"	67				
20"	21"	10"	55				
24"	25"	10"	50				
30"	31"	11"	40				
36"	37"	13"	33				

CHASE ASSOCIATES, Inc.
 Providing access products and technology since 1979



1-888-626-9297 • www.manways.com • [email:info@manways.com](mailto:info@manways.com)